

MERKEL STUFFING BOX PACKINGS

INNOVATING TOGETHER

 **FREUDENBERG**
SEALING TECHNOLOGIES



THE COMPANY

The Freudenberg Group was founded in 1849 and is still family-owned by some 300 descendants of the company founder. The resulting financial stability and social awareness are decisive success factors that create trust and confidence.

Today, Freudenberg is a global, broadly diversified group of companies. While Freudenberg & Co. Kommanditgesellschaft represents the strategic management company, Freudenberg SE as the operational management company reflects the global nature of the Freudenberg Group. Freudenberg is divided into Business Groups operating in a wide range of sectors. From household products of the Vileda® brand to technically complex sealing solutions, the company is always regarded as a leader in innovation and technology leader.

The Group's strong segmentation pursues only one goal: to be close to the customer and to meet the demands of a market specialist. The numerous research and development facilities ensure the long-term success of the company and enable it to respond quickly to market and customer-specific changes. Freudenberg Sealing Technologies (FST) is the largest Business Group in the Freudenberg Group and is part of the Seals and Vibration Control Technology Division. It is a supplier, development and service partner for customers in a wide range of

market segments, for example the automotive industry, civil aviation, mechanical engineering and shipbuilding, the food and pharmaceutical industries and the agricultural and construction machinery industries.

Starting with the Simmerring® developed at Freudenberg in 1929, Freudenberg Sealing Technologies today has a broad, continuously customer-oriented product portfolio of sealing technology - from customized individual solutions to complete sealing packages. Together with its partners NOK Corporation, Japan, Freudenberg NOK, India, and NOK-Freudenberg Group, China, Freudenberg Sealing Technologies forms a global network with the aim of offering products of the same high quality worldwide. Freudenberg Sealing Technologies rounds off its service offering with the Dichtomatik brand, as an industry standard solution, and Corteco, as a specialist for the independent automotive aftermarket.

LIST OF CONTENTS

Standard Packings

Pre-Selection	5
Merkel Ramilon 4586	6
Merkel Arostat 6204	7
Merkel Arolan II 6215	8
Merkel Arochem S 6216	9
Merkel Unistat 6303	10
Merkel Unichem 6313	11
Merkel Unival 6323	12
Merkel Alchem 6375	13
Merkel Grafiflex 6501	14
Merkel Grafiflex Cover Seal	15
Merkel Carbosteam 6550	16
Merkel G-Spezial 6560	17
Merkel G-Spezial S 6565	18
Merkel Uniflex 6588	19
Merkel Kombilon 6742	20
Merkel Univerdit 7000	21
Standard Application Overview	22

Fugitive Emission Control Packings

Fugitive Emission Management	24
Merkel FEC 6250, 7200, 7250, 7290, 6559, 7300, 7888	25

Non-Standard Packings

Product Overview	30
------------------	----

Installation

Gland Design	32
Installation Guide	33
Fitting Tools	34

Media

Media Table	35
Media Table Keyed to Principal Group	36



PRE-SELECTION PACKINGS STANDARD RANGE

Product	Pressure [MPa]			Speed [m/s]		Temperature [°C]	pH value
	Rotary pumps	Plunger pumps	Valves	Rotary pumps	Plunger pumps		
Merkel Ramilon 4586	4	100*		13	2	-40 ... +120	5 ... 11
Merkel Arostat 6204			20			-50 ... +250	1 ... 13
Merkel Arolan II 6215	2.5		10	26		-50 ... +280	1 ... 13
Merkel Arochem S 6216	2.5	25*		25	2	-50 ... +280	1 ... 13
Merkel Unistat 6303		80*	25		2	-200 ... +280	0 ... 14
Merkel Unichem 6313	1.5			8		-100 ... +250	0 ... 14
Merkel Unival 6323	2.5		25	20		-100 ... +280	0 ... 14
Merkel Alchem 6375		50*	25		2	-200 ... +280	0 ... 14
Merkel Grafiflex 6501			100			-200 ... +450 ¹ -200 ... +700 ² -200 ... +2,500 ³	0 ... 14
Merkel Grafiflex Cover Seal			100			-200 ... +450 ¹ -200 ... +700 ² -200 ... +2,500 ³	0 ... 14
Merkel Carbosteam 6550			30			-30 ... +400 ¹ -30 ... +550 ²	0 ... 14
Merkel G-Spezial 6560			45			-200 ... +450 ¹ -200 ... +650 ²	1 ... 14
Merkel G-Spezial S 6565	2.5		25	25		-200 ... +450 ¹ -200 ... +650 ²	0 ... 14
Merkel Uniflex 6588	2.5			25		-50 ... +280	1 ... 13
Merkel Kombilon 6742	2.5			20		-100 ... +280	0 ... 14
Merkel Univerdit 7000	2.5*		16*	6		-30 ... +250	0 ... 14

1 most media and air 2 steam 3 inert gas * installation with anti-extrusion rings

Ordering note:

Standard packings are supplied by the kilo. The content of the boxes in kg in each case is given in the dimension lists in the kg/box column. Packing can also be supplied as rings on request.

The figures indicated in the catalogue are based on experiences gathered within Freudenberg Sealing Technologies in the field of research over several decades for the development and manufacture of seals and they are in line with today's state-of-the-art expertise.

However, the sealing effect provided by numerous products mentioned in the catalogue is not only generated by the component itself. It is rather based to a very large extent – depending on the specific application involved – on other parameters such as the place of installation and counter surface, the pressure applied, the operating temperature, the media to be sealed, the lubrication, vibration-related influences and possible dirt from outside. These and further unknown factors are likely to exert a tangible influence on the function of seals in practical applications.

Against this background, no standard statements can be made about the function of the products mentioned in the catalogue. The data stated in the latter merely represent general, non-binding reference values which cannot be applied to every case of application. As a result, we recommend that you discuss concrete cases of application with our consulting services. In the event of higher and special stresses, e. g. exerted by aggressive media, the seal should be selected in cooperation with us, as functional reliability tests are frequently indispensable.

Environmental protection, improvement in working conditions and increased operational safety are of fundamental importance in the sealing of valves, centrifugal pumps and high-pressure plunger pumps. Correct selection of Merkel packings will ensure these requirements are met.

Thanks to continued material research, the latest in design technology and the most advanced production processes Merkel packings offer superior sealing performance, long service life and the ability to be used in a wide range of applications.

Note

The listed parameters represent maximum values. They refer to the specification of the basic materials and impregnations. The temperature application limit may be influenced by the pressure involved. This temperature/pressure ratio is also widely dependent on the media used. Simultaneous, maximum loads might lead to necessary, relieving measurements.

MERKEL RAMILON 4586

Economical packing, ideal for all water pump applications

Merkel Ramilon is braided from Ramie, an extremely strong and water resistant natural fibre. The packing also contains a high level of PTFE due to a comprehensive impregnation process. This ensures high density and low friction performance. Merkel Ramilon is also widely used in plunger pumps for high-pressure water applications. The packing is approved for use in the food processing industries.

Application

Rotary pumps, refiners, mills, plunger pumps, stern tubes

Media

Cold water, drinking water, sea water, warm water, solutions containing solid particles, oils, greases, solvents, foodstuffs



VALUES TO THE CUSTOMER

- Extremely wear-resistant
- Water resistant
- Strong yarn
- Long service life
- Will not swell or rot
- Excellent pressure resistance

Operating conditions

Pumps		
P	4 MPa 100 MPa*	580 psi 14,300 psi*
T	-40 ... +120 °C	-22 ... +248 °F
v	13 m/s 2 m/s*	2,500 fpm 400 fpm*
pH	5 ... 11	5 ... 11

* installation with end rings

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	12	85.5	1	24115932
4		21	48.1	1	24107608
5	3/16	33	30.8	1	24107609
6		47	21.4	1	24107610
	1/4	52	19.1	1	24121704
8	5/16	83	12.1	2	24107612
	3/8	118	8.5	2	24119759
10		130	7.7	2	24107613
12		187	5.3	3	24107614
	1/2	210	4.8	3	24107615
14	9/16	255	3.9	3	24107616
15		293	3.4	3	24107617
16	5/8	333	3.0	3	24107618
18		421	2.4	3	24107619
19	3/4	469	2.1	3	24117489
20		520	1.9	5	24107620
22	7/8	629	1.6	5	24107621
25	1	813	1.2	10	24113360

Also available in die-formed rings and pre-cut lengths.

MERKEL AROSTAT 6204

Wear-resistant allround packing for static and valve applications



Merkel Arostat is made of wear-resistant and flexible aramid yarn. The packing is thoroughly impregnated with PTFE. This results in a very dense and resilient structure making Merkel Arostat particularly ideal for housing and cover lid applications.

Application

Valves

Media

Cold and hot water, steam up to 180 °C, salt solutions, organic solvents, hydro-carbons, oils, greases, diluted acids and alkalis

VALUES TO THE CUSTOMER

- Highly wear-resistant
- High content of PTFE impregnation
- Extremely flexible
- Can withstand very abrasive media
- Improved density and low leakage
- Minimum maintenance

Operating conditions

Valves		
P	20 MPa	2,900 psi
T	-50 ... +250 °C	-58 ... +482 °F
pH	1 ... 13	1 ... 13

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	10	101.0	1	24246907
4		18	56.8	1	24216841
5	3/16	28	36.4	1	24198908
6		40	25.3	1	24198907
	1/4	44	22.5	1	24353539
8	5/16	70	14.2	2	24198906
9	3/8	89	11.2	2	24335330
10		110	9.1	2	24198042
12		158	6.3	3	24291198
	1/2	177	5.6	3	24353564
14	9/16	216	4.6	3	24224826
15		248	4.0	3	24233204
16	5/8	282	3.6	3	24199444
18		356	2.8	3	24291163
19	3/4	397	2.5	3	24262740
20		440	2.3	5	24250751
22	7/8	532	1.9	5	24261064
25	1	688	1.5	10	24232513

Also available in die-formed rings and pre-cut lengths.

MERKEL AROLAN II 6215

Universal pump packing, especially suitable for abrasive media and shaft deflection



Merkel Arolan II is made from highly wear-resistant aramid yarn with a special PTFE impregnation and a universally stable running-in lubricant. Its high level of resistance to abrasion as well as to temperature and chemical fluctuations make Merkel Arolan II a universal packing for many industry sectors.

Application

Rotary pumps, valves

Media

Cold and hot water, salt solutions, organic solvents, hydrocarbons, oils, greases, diluted acids and alkalis.

VALUES TO THE CUSTOMER

- Robust and durable
- Extremely wear resistant
- Very resilient and flexible
- Suitable for sealing against abrasive media
- Very long service life
- Ideal for sealing against shaft deflection

Operating conditions

Rotary pumps		
p	2.5 MPa	362 psi
T	-50 ... +280 °C	-58 ... +536 °F
v	26 m/s	5,100 fpm
pH	1 ... 13	1 ... 13
Valves		
p	10 MPa	1,450 psi
T	-50 ... +280 °C	-58 ... +536 °F
pH	1 ... 13	1 ... 13

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	12	84.2	1	24195260
4		21	47.3	1	24181505
5	3/16	33	30.3	1	24181506
6		48	21.0	1	24172093
	1/4	53	18.8	1	24180316
8	5/16	84	11.8	2	24175041
	3/8	120	8.3	2	24175049
10		132	7.6	2	24177176
12		190	5.3	3	24175522
	1/2	213	4.7	3	24175051
14	9/16	259	3.9	3	24170381
15		297	3.4	3	24175638
16	5/8	338	3.0	3	24181718
18		428	2.3	3	24180328
19	3/4	477	2.1	3	24178406
20		528	1.9	5	24174987
22	7/8	639	1.6	5	24188238
25	1	825	1.2	10	24181719

Also available in die-formed rings and pre-cut lengths.

MERKEL AROCHEM S 6216

Pump packing suitable for high shaft speeds and abrasive media.



Merkel Arochem S combines the advantages of two advanced yarn materials in the sealing of high-speed shafts. The particular running qualities of thermally stable PTFE-graphite compound yarn ensure shaft protection and even short-term „dry-running“ without damage. Due to their stability, wear-resistant aramid yarn edges prevent packing extrusion and protects against abrasive media. Merkel Arochem S contains a universally stable silicone-free lubricant. This ensures superior lubrication during the run-in phase.

Application

Rotary pumps, plunger pumps

Media

Hot water, salt solutions, alkalis, organic solvents, hydrocarbons, medium concentration acids

VALUES TO THE CUSTOMER

- Thermally stable PTFE-graphite compound running surface
- Wear-resistant multi-filament aramid yarn in the corners
- Very stable and dense
- Smooth running, low friction
- Anti-extrusion protection and extra stability
- Ideal for higher pressure/wider clearance gaps

Operating conditions

Rotary pumps		
p	2.5 MPa	362 psi
T	-50 ... +280 °C	-58 ... +536 °F
v	25 m/s	4,900 fpm
pH	1 ... 13	1 ... 13
Plunger pumps		
p	25 MPa	3,625 psi
T	-50 ... +280 °C	-58 ... +536 °F
v	2 m/s	400 fpm
pH	1 ... 13	1 ... 13

mm	inch	g/m	m/kg	kg/box	Article No.
5	3/16	38	26.7	1	24258231
6		54	18.5	1	24233069
	1/4	60	16.5	1	24251376
8	5/16	96	10.4	2	24232488
	3/8	136	7.3	2	24242764
10		150	6.7	2	24232489
12		216	4.6	3	24232490
	1/2	242	4.1	3	24237883
14	9/16	294	3.4	3	24233070
15		338	3.0	3	24234711
16	5/8	384	2.6	3	24233071
18		486	2.1	3	24239422
19	3/4	542	1.8	3	24242763
20		600	1.7	5	24232491
22	7/8	726	1.4	5	24250804
25	1	938	1.1	10	24232492

Also available in die-formed rings and pre-cut lengths.

MERKEL UNISTAT 6303

Ideal for control valves and plunger pumps

Merkel Unistat is manufactured from graphite-filled PTFE yarn. The high level of graphite ensures excellent heat conduction while the PTFE content provides low friction performance. Due to its dense and pressure-resistant structure Merkel Unistat is widely used in plunger pump applications. In addition, its excellent chemical resistance allows for universal use in the chemical industry.

The packing is approved for use in the food processing industries.

Application


Plunger pumps, valves

Media

Steam, condensate, alkalis, solvents, almost all acids.

Exceptions: highly concentrated nitric acid and oleum.

BAM approval for gaseous oxygen (4 MPa up to 150 °C; 3 MPa up to 200 °C)

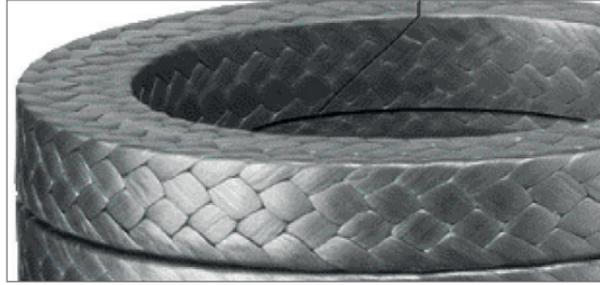

VALUES TO THE CUSTOMER

- Stable PTFE-graphite compound
- High graphite content
- Very low soluble chlorides content
- High chemical and pressure stability
- Excellent thermal conductivity
- Suitable for use in nuclear applications

Operating conditions

Valves		
p	25 MPa	3,625 psi
T	-200 ... +280 °C	-328 ... +536 °F
pH	0 ... 14	0 ... 14
Plunger pumps		
p	80 MPa*	11,600 psi*
T	-200 ... +280 °C	-328 ... +536 °F
v	2 m/s	400 fpm
pH	0 ... 14	0 ... 14

*installation with end rings

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	13	76.6	1	24192301
4		23	43.1	1	24195261
5	3/16	36	27.6	1	24192302
6		52	19.2	1	24127129
	1/4	59	16.8	1	24353543
8	5/16	93	10.8	2	24183946
	3/8	131	7.6	2	24147002
10		145	6.9	2	24183126
12		209	4.8	3	24187294
	1/2	234	4.3	3	24147003
14	9/16	284	3.5	3	24195262
15		326	3.1	3	24235919
16	5/8	371	2.7	3	24191302
18		470	2.1	3	24195263
19	3/4	523	1.9	3	24193673
20		580	1.7	5	24195264
22	7/8	702	1.4	5	24191529
25	1	906	1.1	10	24188161

Also available in die-formed rings and pre-cut lengths.

MERKEL UNICHEM 6313

Rotary pump packing ideal for all chemical media

Merkel Unichem is made from pure PTFE yarn with an additional PTFE impregnation and lubricant. It has a very dense but soft and pliable structure so that sealing can be achieved with a minimum of gland pressure. Due to its excellent lubrication Merkel Unichem exhibits very low friction.

The packing is approved for use in the food processing industries.

Merkel Unichem is also available as a flat tape material for static sealing.*

*Dimensions are available on request

Application

Rotary pumps

Media

All chemicals including concentrated hot acids and alkalis.

Exceptions: molten alkali metals, fluorine and some fluorine compounds



VALUES TO THE CUSTOMER

- Very pliable
- Very dense when compressed
- 0-14 pH range
- Provides excellent sealing effect
- Very low leakage performance
- Can be used in all chemical applications

Operating conditions

Rotary pumps		
p	1.5 MPa	220 psi
T	-100 ... +250 °C	-148 ... +482 °F
v	8 m/s	1,600 fpm
pH	0 ... 14	0 ... 14

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	15	64.6	1	24107742
4		28	36.3	1	24107743
5	3/16	43	23.3	1	24107744
6		62	16.2	1	24107745
	1/4	70	14.2	1	24124436
8	5/16	110	9.1	2	24107746
	3/8	156	6.4	2	24121470
10		172	5.8	2	24107747
12		248	4.0	3	24107748
	1/2	277	3.6	3	24120009
14	9/16	337	3.0	3	24116266
15		387	2.6	3	24117707
16	5/8	440	2.3	3	24116267
18		557	1.8	3	24115577
19	3/4	621	1.6	3	24266456
20		688	1.5	5	24115575
22	7/8	832	1.2	5	24115576
25	1	1,075	0.9	10	24120976

Also available in die-formed rings and pre-cut lengths.

MERKEL UNIVAL 6323

Universal packing for high speed/high temperature pumps



Merkel Unival consists of graphite-filled lubricated PTFE yarn. The special braiding structure offers the benefits of low thermal expansion and excellent heat conduction. Due to its low friction characteristics Merkel Unival can also withstand dry running up to a certain limit. In addition, its pliable and dense composition allows Merkel Unival to seal effectively with a minimum of gland pressure. The packing is approved for use in the food processing industries.

Application

Rotary pumps, valves

Media

Alkalis, solvents, bitumen, almost all acids.

Exceptions: highly concentrated nitric acid, oleum

VALUES TO THE CUSTOMER

- Very low thermal expansion
- Low friction characteristics
- Dense and pliable composition
- Ability to run at high speeds
- Longer service life
- Low leakage with a minimum of gland pressure

Operating conditions

Valves		
p	25 MPa	3,625 psi
T	-100 ... +280 °C	-148 ... +536 °F
pH	0 ... 14	0 ... 14
Rotary pumps		
p	2.5 MPa	362 psi
T	-100 ... +280 °C	-148 ... +536 °F
v	20 m/s	3,900 fpm
pH	0 ... 14	0 ... 14

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	14	69.4	1	24230131
4		26	39.1	1	24191207
5	3/16	40	25.0	1	24187457
6		58	17.4	1	24186270
	1/4	65	15.5	1	24188526
8	5/16	102	9.8	2	24186511
	3/8	145	6.9	2	24188537
10		160	6.3	2	24186500
12		230	4.3	3	24186161
	1/2	258	3.9	3	24193723
14	9/16	314	3.2	3	24187392
15		360	2.8	3	24186570
16	5/8	410	2.5	3	24188237
18		518	1.9	3	24193023
19	3/4	578	1.7	3	24199600
20		640	1.6	5	24186633
22	7/8	774	1.3	5	24191064
25	1	1,000	1.0	10	24186194

Also available in die-formed rings and pre-cut lengths.

MERKEL ALCHEM 6375

Universal chemical valve packing



Merkel Alchem is manufactured from pure PTFE yarn with an additional PTFE impregnation, ensuring excellent chemical resistance. Its high density and tight braid structure ensure very low leakage performance. The packing has a high degree of form stability and a low compressibility which makes it also suitable for plunger pump applications. The packing is approved for use in the food processing industries.

Application

Plunger pumps, valves

Media

All chemicals including concentrated hot acids and alkalis

Exceptions: molten alkali metals, fluorine and some fluorine compounds

BAM approved for gaseous oxygen (3 MPa up to 60 °C)

VALUES TO THE CUSTOMER

- Particularly tight braid and dense structure
- High degree of form stability and compressibility
- Low soluble chloride content
- Very low leakage rates
- Very low setting rates
- Suitable for nuclear applications

Operating conditions

Valves		
p	25 MPa	3,625 psi
T	-200 ... +280 °C	-328 ... +536 °F
pH	0 ... 14	0 ... 14
Plunger pumps		
p	50 MPa*	7,250 psi*
T	-200 ... +280 °C	-328 ... +536 °F
v	2 m/s	400 fpm
pH	0 ... 14	0 ... 14

* installation with end rings

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	16	63.5	1	24107749
4		28	35.7	1	24107750
5	3/16	44	22.9	1	24107751
6		63	15.9	1	24107752
	1/4	72	14.0	1	24115712
8	5/16	112	8.9	2	24107753
	3/8	159	6.3	2	24117570
10		175	5.7	2	24107754
12		252	4.0	3	24107755
	1/2	282	3.5	3	24107756
14	9/16	343	2.9	3	24116248
15		394	2.5	3	24116340
16	5/8	448	2.2	3	24107757
18		567	1.8	3	24117869
19	3/4	632	1.6	3	24192581
20		700	1.4	5	24115579
22	7/8	847	1.2	5	24115580
25	1	1,094	0.9	10	24121883

Also available in die-formed rings and pre-cut lengths.

MERKEL GRAFIFLEX

Packing rings for high temperature valve applications



Merkel Grafiflex is characterized by a high level of chemical resistance and thermal stability as well as excellent sealing effect and constant elasticity. Regardless of temperature cycle this material is not subject to cold flow, shrinkage or aging. Merkel Grafiflex fulfills the purity requirements for seals in nuclear power station valves (content of soluble chlorides < 20 ppm).

The packing is approved for use in the food processing industries (version 6501 additionally for drinking water, respectively KTW compliant).

Preformed **Merkel Grafiflex rings** are supplied in densities between 1.4 and 1.85 g/cm³.

Additionally they are available as:

- Merkel Grafiflex Cover Lid seals (see page 15)
- Merkel Grafiflex **6501** with carbon content 98% or 99,85%
- Merkel Grafiflex **6561** with carbon content 98% and PTFE coating
- Merkel Grafiflex **6509** with carbon content 99,85% and corrosion inhibitor

Merkel Grafiflex tape is also available as foil material with a unique surface pattern for quick repair service.

Merkel Grafiflex material is approved for use in food, drinking water and oxygen applications.

For re-conditioned valves we recommend the combined use of Merkel Grafiflex and Merkel Carbosteam 6550 anti-extrusion rings.

Application

Valves

Media

Hot water and feed water, steam, heat transfer oils, hydrocarbons and many other media

Exceptions: strongly oxidising media

BAM approved for gaseous oxygen (45 MPa up to 60°C; 22 MPa up to 200°C)

VALUES TO THE CUSTOMER

- Pure expanded graphite
- Dense and resilient
- Wide variety of moulds available
- Very high temperature and chemical resistance
- Excellent sealing effect and constant elasticity
- Fast delivery without mould charges

Operating conditions

Valves		
p	100 MPa	14,500 psi
T	-200 ... +450 °C ¹	-328 ... +842 °F ¹
	-200 ... +700 °C ²	-328 ... +1,292 °F ²
	-200 ... +2,500 °C ³	-328 ... +4,532 °F ³
pH	0 ... 14	0 ... 14

1 most media and air 2 steam 3 inert gas

MERKEL GRAFIFLEX COVER SEALS

Packing rings for high pressure cover seal applications



Merkel Grafiflex-cover seals are supplied as preformed rings and offer proven high performance, especially in heavy-duty valves or high-pressure feed-water pre-heaters. Merkel Grafiflex remains elastic even with fluctuating temperatures and pressures up to 200 N/mm². Clearances up to 0.3 mm can be sealed without difficulty. Larger gaps can be controlled by Merkel Grafiflex reinforced with stainless steel springs or caps integrated into the corners.

Application

Valves

Media

Hot water and feed water, steam, heat transfer oils, hydrocarbons and many other media.

Exceptions: strongly oxidising media.

VALUES TO THE CUSTOMER

- Pure expanded graphite
- Dense and resilient
- Incorporated spring insert/caps
- Fast delivery without mould charges
- Very high temperature and chemical resistance
- Excellent sealing effect and constant elasticity
- Prevents extrusion at high pressures and temperatures
- Fast delivery without mould charges




Operating conditions

Valves		
p	100 MPa	14,500 psi
T	-200 ... +450 °C ¹	-328 ... +842 °F ¹
	-200 ... +700 °C ²	-328 ... +1,292 °F ²
	-200 ... +2,500 °C ³	-328 ... +4,532 °F ³
pH	0 ... 14	0 ... 14


1 most media and air 2 steam 3 inert gas

Ø D	B	S _(centr.)
≤350	≤20	≤0.8
≤350	≥20	≤1.2
>350	≤20	≤0.8
>350	≤25	≤1.2
>350	≥25	≤1.5

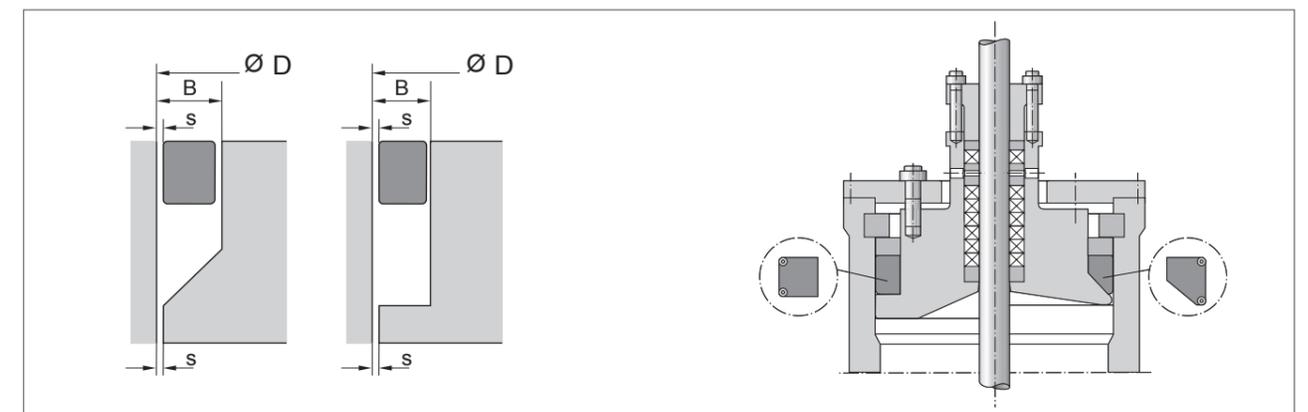

MERKEL CARBOSTEAM 6550

High temperature valve packing

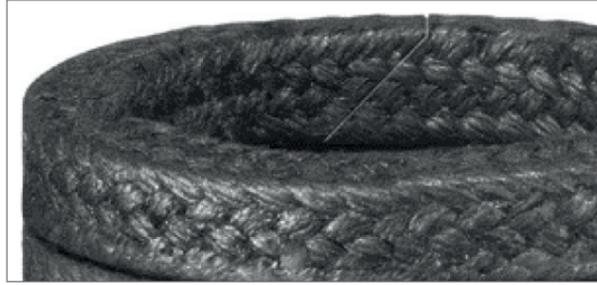

Merkel Carbosteam is made of flexible carbon yarns and a special graphite-based impregnation. Thanks to its excellent thermal stability Merkel Carbosteam is widely used in high temperature steam applications. Because of its high pressure and extrusion resistance Merkel Carbosteam is ideally used as end rings for Merkel Grafiflex and Merkel G-Spezial and Merkel G-Spezial S.

Application

Valves

Media

Hot water, hot air, steam, acids and alkalis
Exceptions: strongly oxidizing media such as hot sulfuric acid and nitric acid

VALUES TO THE CUSTOMER

- Thermally stable carbon yarn and impregnation
- High graphite content in impregnation
- High strength carbon yarns
- Very high temperature resistance
- Reduced friction, longer service life
- Used as anti-extrusion and wiper end rings with Grafiflex or G-Spezial

Operating conditions

Valves		
p	30 MPa	4,350 psi
T	-30 ... +400 °C ¹ -30 ... +550 °C ²	-22 ... +750 °F ¹ -22 ... +1,022 °F ²
pH	0 ... 14	0 ... 14


1 most media and air 2 steam

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	10	101.0	1	24199354
4		18	56.8	1	24196161
5	3/16	28	36.4	1	24191670
6		40	25.3	1	24196568
	1/4	44	22.2	1	24199357
8	5/16	70	14.2	2	24191671
	3/8	99	10.1	2	24199361
10		110	9.1	2	24191672
12		158	6.3	3	24190391
	1/2	177	5.6	3	24199363
14	9/16	216	4.6	3	24197176
15		248	4.0	3	24216138
16	5/8	282	3.6	3	24195492
18		356	2.8	3	24199366
19	3/4	397	2.5	3	24315375
20		440	2.3	5	24199368
22	7/8	532	1.9	5	24290307
25	1	688	1.5	10	24199373

Also available in die-formed rings and pre-cut lengths.

MERKEL G-SPEZIAL 6560

General service packing for high temperature steam valves

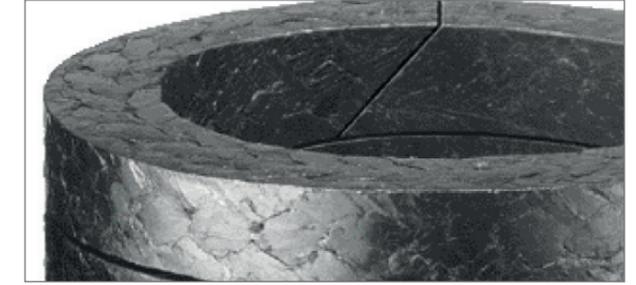

Merkel G-Spezial is made from temperature-resistant flexible graphite yarns, reinforced with a thin Inconel wire. This highly pressure resistant braided packing has the same excellent sealing effect as pure die-formed graphite rings. Merkel G-Spezial is particularly suitable for quick-repair service. For clearance gaps greater than 0.2 mm we recommend the use of Merkel Carbosteam 6550 anti-extrusion rings. Can be used in combination with Merkel Carbosteam 6550 end rings for high-pressure valve applications. Also available with corrosion inhibitor, Merkel G-Spezial S 6569.

Application

Valves

Media

Hot water, steam, gases, oils, acids and alkalis
Exceptions: strongly oxidizing acids such as sulfuric and nitric acid in high concentrations

VALUES TO THE CUSTOMER

- Pure expanded graphite yarn
- Extremely dense when compressed
- Reinforced with Inconel wire
- Ideal service packing
- High temperature and chemical resistance
- Very low leakage
- High pressure resistance
- Quick repair for all valve dimensions

Operating conditions

Valves		
p	45 MPa	5,800 psi
T	-200 ... +450 °C ¹ -200 ... +650 °C ²	-328 ... +842 °F ¹ -328 ... +1,022 °F ²
pH	1 ... 14	1 ... 14


1 most media and air 2 steam

mm	inch	g/m	m/kg	kg/box	Article No.
4		19	52.1	1	24356667
5	3/16	30	33.3	1	24356668
6		43	23.1	1	24356669
	1/4	49	20.3	1	24377809
8	5/16	77	13.0	2	24356670
	3/8	108	9.2	2	24377978
10		120	8.3	2	24356671
12		173	5.8	3	24356672
	1/2	194	5.2	3	24356673
14	9/16	235	4.3	3	24356674
15		270	3.7	3	24356675
16	5/8	307	3.3	3	24356676
18		389	2.6	3	24356677
19	3/4	433	2.3	3	24356678
20		480	2.1	5	24356679
22	7/8	557	1.7	5	24373834
25	1	719	1.3	10	24373836

Also available in die-formed rings and pre-cut lengths.

MERKEL G-SPEZIAL S 6565

High performance service packing for pumps and valves

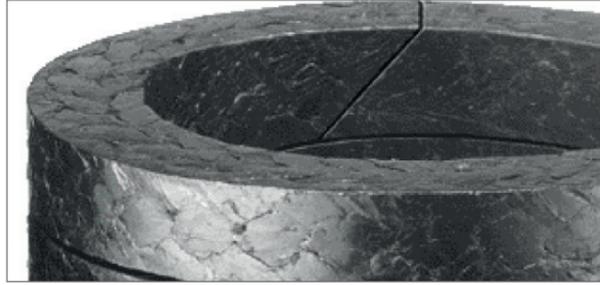

Merkel G-Spezial S is braided from expanded pure graphite and is suitable for the use in pump and valve applications. It combines all the advantages of expanded graphite, such as high temperature stability and cross sectional density. Rings from Merkel G-Spezial S can be cut easily from a roll, thus ensuring a prompt repair service. Can be used in combination with Merkel Carbosteam 6550 end rings for high pressure valve applications.

Application

Valves, rotary pumps

Media

Hot water, steam, gases, oils, acids and alkalis
Exceptions: strongly oxidizing acids like sulfuric acid and nitric acid in high concentrations

VALUES TO THE CUSTOMER

- Pure expanded graphite
- Dense and resilient
- Wide variety of moulds available
- Very high temperature and chemical resistance
- Excellent sealing effect and constant elasticity
- Fast delivery without mould charges

Operating conditions

Valves		
p	25 MPa	3,556 psi
T	-200 ... +450 °C ¹⁾ -200 ... +650 °C ²⁾	-328 ... +842 °F ¹⁾ -328 ... +1202 °F ²⁾
pH	0 ... 14	0 ... 14
Rotary pumps		
p	2.5 MPa	362 psi
T	-200 ... +450 °C ¹⁾ -200 ... +650 °C ²⁾	-328 ... +842 °F ¹⁾ -328 ... +1202 °F ²⁾
v	25 m/s	4,900 fpm
pH	0 ... 14	0 ... 14

1 most media and air 2 steam

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	10	96.6	1	49302798
4		18	54.4	1	00527400
5	3/16	29	34.8	1	49001846
6		41	24.2	1	00527397
	1/4	46	21.6	1	00529142
8	5/16	74	13.6	2	00527398
9		93	10.7	2	49054414
	3/8	104	9.6	2	49054415
10		115	8.7	2	00527399
12		166	6.0	3	00527640
	1/2	185	5.4	3	00529143
14	9/16	225	4.4	3	00527641
15		259	3.9	3	00528454
16	5/8	294	3.4	3	00527642
18		373	2.7	3	00527643
19	3/4	415	2.4	3	49054416
20		460	2.2	5	00527644
22	7/8	557	1.8	5	49054417
25	1	719	1.4	10	49054419

Also available in pre-cut lengths.

MERKEL UNIFLEX 6588

The ideal general-purpose pump packing



Merkel Uniflex is manufactured from a carbonized yarn with a special PTFE-graphite impregnation. The packing is very flexible and extrusion-resistant. The impregnation maintains an excellent bond to the yarn over the complete life of the packing. The thermal and volumetric stability provides superior sealing performance with minimal gland compression. These features make Merkel Uniflex suitable for use in "dry-running" applications.

Application

Rotary pumps

Media

Cold and hot water, steam, aqueous solutions, diluted acids and alkalis

VALUES TO THE CUSTOMER

- High carbon content
- Strong, flexible yarn
- Excellent long-term bond between impregnation and yarn
- Very good heat dissipation
- Extrusion resistant and good resilience
- Long service life, can run "dry" for periods

Operating conditions

Pumps		
p	2.5 MPa	362 psi
T	-50 ... +280 °C	-58 ... +536 °F
v	25 m/s	4,900 fpm
pH	1 ... 13	1 ... 13

mm	inch	g/m	m/kg	kg/box	Article No.
6		48	21.0	1	24374614
	1/4	54	18.5	1	24374615
8	5/16	84	11.8	2	24374616
	3/8	120	8.4	2	24374617
10		132	7.6	2	24374618
12		190	5.3	3	24374619
	1/2	213	4.7	3	24374620
14	9/16	259	3.9	3	24374621
15		297	3.4	3	24374622
16	5/8	338	3.0	3	24374623
18		428	2.3	3	24374624
19	3/4	477	2.1	3	24374625
20		528	1.9	5	24374626
25	1	825	1.2	10	24374627

Also available in die-formed rings and pre-cut lengths.

MERKEL KOMBILON 6742

Ideal for rotary pumps and agitators in the paper and chemical industry



Merkel Kombilon is an elastic combination braid made from carbon and PTFE yarns. It is impregnated with a special PTFE compound and running-in lubricant.

The unique construction of Merkel Kombilon provides a very low coefficient of friction and exceptional resilience making it ideal for mixer or agitator applications.

The packing maintains its elasticity even after prolonged operation and under high contact pressure. The specially processed carbon yarns ensure excellent flexibility and shaft protection. The packing is approved for use in the food processing industries.

Application

Rotary pumps, agitators and mixers

Media

Alkalis, all forms of solvents, alcohols, ketones, esters, oils, acids, hot water, boiler lye, brine, ammonia
Exceptions: strongly oxidizing acids

VALUES TO THE CUSTOMER

- Excellent elasticity and resilience
- Very low coefficient of friction
- Good heat dissipation and creep resistance
- Low leakage rates even with slight shaft deflection
- Longer operating life
- Excellent performance at higher temperatures

Operating conditions


Pumps		
p	2.5 MPa	362 psi
T	-100 ... +280 °C	-148 ... +536 °F
v	20 m/s	3,900 fpm
pH	0 ... 14	0 ... 14

mm	inch	g/m	m/kg	kg/box	Article No.
4		26	37.9	1	24293761
5	3/16	41	24.2	1	24293762
6		59	16.8	1	24293763
	1/4	68	14.8	1	24327565
8	5/16	106	9.5	2	24293764
	3/8	150	6.7	2	24312110
10		165	6.1	2	24293765
12		238	4.2	3	24293766
	1/2	266	3.8	3	24302371
14	9/16	323	3.1	3	24292346
15		371	2.7	3	24314668
16	5/8	422	2.4	3	24293767
18		535	1.9	3	24301906
19	3/4	596	1.7	3	24337151
20		660	1.5	5	24293768
25	1	1,031	1.0	10	24299492

Also available in die-formed rings and pre-cut lengths.

MERKEL UNIVERDIT 7000

Special high-density pump and valve packing

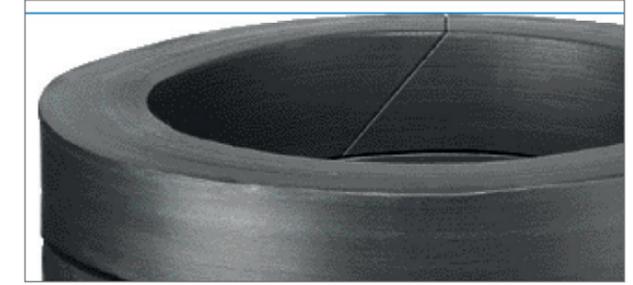

Compact extruded packing made of PTFE graphite compound. **Merkel Univerdit** has extremely good resistance to gas permeation and has the ability to embed abrasive particles. Merkel Univerdit remains self-lubricating even during extended periods of operation and therefore reduces friction on shafts and spindles. Generally, Merkel Univerdit must always be installed with end rings.*

* End-ring selection is dependent on application parameters

Application

Rotary pumps, valves

Media

Alkalis, all forms of solvents, alcohols, ketones, esters, oils, acids, hot water, boiler lye, brine, ammonia
Exceptions: strongly oxidizing acids

VALUES TO THE CUSTOMER

- Very high density
- Both pliable and volumetrically stable
- Ability to absorb media particles
- Self-lubricating
- Resistance to gas permeation
- Easy installation and long service life
- Ideal for sealing abrasive media
- Can run "dry" in some applications

Operating conditions

Valves		
p	16 MPa	2,230 psi
T	-30 ... +250 °C	-22 ... +482 °F
pH	0 ... 14	0 ... 14
Rotary pumps		
p	2.5 MPa	362 psi
T	-30 ... +250 °C	-22 ... +482 °F
v	6 m/s	1,200 fpm
pH	0 ... 14	0 ... 14

mm	inch	g/m	m/kg	kg/box	Article No.
3	1/8	16	61.7	1	24139912
4		29	34.7	1	24115567
5	3/16	45	22.2	1	24107764
6		65	15.4	1	24107765
	1/4	73	13.8	1	24121706
8	5/16	115	8.7	2	24107766
	3/8	162	6.2	2	24117922
10		180	5.6	2	24107767
12		259	3.9	3	24107768
	1/2	290	3.4	3	24117923
14	9/16	353	2.8	3	24107770
15		405	2.5	3	24120253
16	5/8	461	2.2	3	24107771
18		583	1.7	3	24115709
19	3/4	650	1.5	3	24120998
20		720	1.4	5	24107772
22	7/8	871	1.1	5	24141641
25	1	1,125	0.9	10	24116047

Also available in pre-cut lengths.

STANDARDISATION PROPOSALS

These proposals are guidelines only.
For further advice please contact our Technical Department

Type of industry	Media	Pumps, Agitators etc.								Valves						
		Arochem S 6216	Arolan II 6215	Kombilon 6742	Ramilon 4586	Unichem 6313	Uniflex 6588	Unistat 6303	Unival 6323	Univerdit 7000	Alchem 6375	Arostat 6204	Carbosteam 6550	Grafflex 6501	G-Spezial 6560	G-Spezial S 6565
Breweries	Mash				■				■							
	Wort				■				■							
	Water				■				■							
	Beer				■				■							
	Brine				■				■							
	Washing solution				■				■							
	Ammonia				■				■							
	Steam									■		■	■	■	■	■
	Chemical industry in general	Alkalis	■	■	■		■	■	■	■		■				
Inorganic acids				■		■		■	■		■					
Organic acids		■	■	■		■	■	■	■		■					
Crystalline media										■	■					
Hardening media										■	■					
Halogens				■		■	■		■	■	■					
Solvents: aliphatic					■				■		■					
Arom. and chlorinated					■				■		■					
Alcohols		■	■		■		■	■		■						
Esters		■	■		■		■	■		■						
Ketones		■	■		■		■	■		■						
Oils and greases		■	■		■		■	■		■						
Water (incl. waste)		■	■		■		■	■		■						
Steam											■	■	■	■	■	
Paint industry	Greasing oils				■						■					
	Solvents				■						■					
	Dispersion paints				■						■					
	Synthetic resin paints				■					■	■					
Power stations	Boiler feed water			■					■		■					
	Condensate	■	■		■		■				■					
	Cooling water	■	■		■		■				■					
	River water	■	■		■		■				■					
Steam											■	■	■	■	■	

■ type of packing

Type of industry	Media	Pumps, Agitators etc.								Valves							
		Arochem S 6216	Arolan II 6215	Kombilon 6742	Ramilon 4586	Unichem 6313	Uniflex 6588	Unistat 6303	Unival 6323	Univerdit 7000	Alchem 6375	Arostat 6204	Carbosteam 6550	Grafflex 6501	G-Spezial 6560	G-Spezial S 6565	
Paper industry	Fibrous water				■				■						■		
	Pulp				■				■						■		
	Drum water				■				■						■		
	Condensed water				■				■						■		
	Screening water				■				■						■		
	Waste water				■				■						■		
	Liquors	■	■												■		
	Steam													■	■	■	
	Refineries	Crude oil	■	■								■	■				
		Aliphatic hydrocarbons	■	■								■	■				
Aromatic hydrocarbons		■	■								■	■					
Chlorinated hydrocarbons		■	■								■	■					
Bitumen		■	■	■		■	■		■	■							
Heat transfer oils															■		
Steam														■	■	■	
Organic acids				■		■	■		■								
Inorganic acids				■		■	■		■		■	■					
Chlorine				■		■	■		■		■	■					
Caustics				■		■	■	■	■		■	■					
Pulp industry	Boiler liquids: pH 1–3			■		■	■	■	■		■	■					
	Boiler liquids: pH 13–14			■		■		■	■		■	■					
	Chlorine dioxide			■		■		■	■								
	Sulfite water			■		■		■	■								
	Hypochlorite			■		■		■	■								
	Hydrochloric acid			■		■		■	■								
	Fibre suspension								■								
Steam														■	■		
Cement industry	Muds				■				■						■		
	Water				■										■		
Sugar industry	Water (with sand)				■						■	■					
	Juice				■						■	■					
	Lime milk				■						■	■					
	Skimming froth				■						■	■					
	Sugar juice, molasses				■						■	■					
	Steam														■	■	

■ type of packing

FUGITIVE EMISSION MANAGEMENT

MERKEL VALTEC – WITH THIS PRODUCT BRAND FREUDENBERG OFFERS THE COMPLETE RANGE OF LOW FUGITIVE EMISSION PACKINGS – FOR BOTH, NEW VALVES AND RETROFITS.

Especially when combined with an application specific live-loading system Merkel Valtec packings achieve leakage rates which are consistently lower than those required by legislation. This is why our products are approved at leading end users and OEM manufacturers.

Environmental Protection with Merkel Packings

Valves, especially control valves, account for approximately 60 % of the leakage loss in a plant. For processes containing hazardous fluids conventional packings can be replaced with low emission sealing sets.

Fugitive Emission Control Sealing Technology helps to

1. Increase plant safety
2. Protect our environment
3. Increase plant efficiency and throughput
4. Improve your bottom line
5. Meet strictest emission standards worldwide

Relevant Standards

ISO 15848 (Parts 1 and 2), Clean Air Act, API 622, API 624, VDI 2440, TA-Luft.



MERKEL VALTEC 6350

Ideal for Fugitive Emission and control valves

Merkel Valtec 6350 has a carbon yarn core and is concentrically over braided with a dense PTFE yarn sleeve. In addition it contains a special impregnation to enhance the cross-sectional density of the packing.

Application

This product is designed for the use in fugitive emission on/off and control valves. It is very flexible and retains sufficient gland pressure even after several temperature cycles without retightening.

Media

Hot water, alkalis, organic solvents, gases, oils, greases, medium concentration acids and lyes.

Exceptions: strongly oxidizing acids such as sulfuric and nitric acid in high concentrations.

Certificates / Approvals

Ideal for ISO 15848 qualification.



VALUES TO THE CUSTOMER

- Very low leakage rates
- Stays flexible even after temperature cycles
- Good pressure and extrusion resistance
- Low friction
- Easy handling

Operating Conditions

Valves		
p	30 MPa	4,350 psi
T	-100 ... +280 °C	-148 ... +536 °F
v	2 m/s	394 fpm
pH	0 ... 14	0 ... 14

MERKEL VALTEC 7200

Ideal for Valve OEM's and retrofit in Gas, Oil, Process and General industry

Merkel Valtec 7200 is made from high grade impregnated non-woven materials. The rings consist of aramid non-woven fibers with a special PTFE impregnation and are suitable for Low Emission applications.

Application

Valves

Media

Most chemicals (solvents, hydrocarbons, acids, lyes), alcohols, water, oils etc.

Exceptions: highly concentrated acids and lyes, fluorine and some fluorine compounds.

Certificates / Approvals

TA-Luft, ISO 15848.



VALUES TO THE CUSTOMER

- Extremely low leakage rate
- High cross sectional density and stability
- Excellent low friction properties
- Suitable for applications which require high cleanliness

Operating Conditions

Valves		
p	25 MPa	3,626 psi
T	-200 ... +280 °C	-348 ... +536 °F
v	2 m/s	394 fpm
pH	0 ... 14	0 ... 14

MERKEL VALTEC 7250

Ideal for Valve OEM's and retrofit in Gas, Oil, Process and General industry

Merkel Valtec 7250 is the state of the art sealing technology by combination of two non-woven materials. The end rings of the non woven fibers offer a high carbon content. The intermediate rings consist of aramid non-woven fibers with special PTFE impregnation.

Application
Valves

Media
Most chemicals (solvents, hydrocarbons, acids, lyes), alcohols, water, oils etc.
Exceptions: highly concentrated acids and lyes, fluorine and some fluorine compounds.

Certificates / Approvals
TA-Luft, ISO 15848.



VALUES TO THE CUSTOMER

- Ideally suited for control valves in fugitive emission applications
- Excellent resistance against gap extrusion

Operating Conditions

Valves		
p	25 MPa	3,626 psi
T	-200...+280 °C	-348...+536 °F
v	2 m/s	394 fpm
pH	0...14	0...14

MERKEL VALTEC 7290

Ideal for retrofit in Gas, Oil, Process and General industry

Merkel Valtec 7290 is based on braided end rings of expanded pure graphite reinforced with carbon yarn corners. It features high density expanded graphite disks with permeation barrier, uniquely impregnated high density expanded graphite adapter rings and a low density expanded graphite sealing ring with special friction reducing coating.

Application
Valves

Media
Most chemicals (solvents, hydrocarbons, acids, lyes), steam, alcohols, oils etc.

Certificates / Approvals
TA-Luft, ISO 15848, API 622, API 598 (Fire Safe).



VALUES TO THE CUSTOMER

- Up to 80 % lower friction compared to standard sealing systems made of expanded graphite
- Very low spindle torques at high temperature
- Low compression required due to optimized force deflection

Operating Conditions

Valves		
p	30 MPa	4,350 psi
T	-200...+400 °C (most media) -200...+550 °C (steam)	-348...+752 °F -348...+1022 °F
v	2 m/s	394 fpm
pH	0...14	0...14

MERKEL VALTEC 6559

For retrofit in Gas, Oil, Process and General industry

Merkel Valtec 6559 is braided from high purity expanded graphite material (C-content > 99 %) over knitted with Inconel wire. It contains a special high temperature impregnation and a corrosion inhibitor.

Application
Valves

Media
Hot water, steam, gases, oils, acids and alkalis.
Exceptions: strongly oxidizing acids like sulfuric acid and nitric acid in high concentrations.

Certificates / Approvals
TA-Luft, ISO 15848, API 622, API 598 (Fire Safe), Chevron and Texaco Test.



VALUES TO THE CUSTOMER

- High pressure resistance
- Excellent performance for fugitive emission and TA-Luft valves
- Quick repair for all valve dimensions

Operating Conditions

Valves		
p	45 MPa	6,527 psi
T	-200...+450 °C (most media) -200...+650 °C (steam)	-348...+842 °F -348...+1202 °F
v	2 m/s	394 fpm
pH	0...14	0...14

MERKEL VALTEC 7300

Ideal for Valve OEM's

Merkel Valtec 7300 sealing set contains five packing rings made from laminated carbon non-woven and expanded graphite foil. The packing is additionally coated with a special high temperature impregnation.

Application
Valves

Media
Most chemicals (solvents, hydrocarbons, acids, lyes), alcohols, water, oils etc.
Exceptions: strongly oxidizing acids like sulfuric acid and nitric acid in high concentrations.

Certificates / Approvals
TA-Luft, ISO 15848, API 598 (Fire Safe)



VALUES TO THE CUSTOMER

- Ideally suited for control valves in fugitive emission applications
- Excellent resistance against gap extrusion

Operating Conditions

Valves		
p	25 MPa	3,626 psi
T	-200...+400 °C (most media) -200...+550 °C (steam)	-348...+752 °F -348...+1022 °F
v	2 m/s	394 fpm
pH	0...14	0...14

MERKEL VALTEC 7888

Ideal for use in low fugitive emission valve applications



Merkel Valtec 7888 packing set is based on engineered end rings braided by wire reinforced expanded pure graphite yarns. The middle rings are based on uniquely impregnated expanded graphite rings in different densities. All single components are additionally impregnated to further improve sealability and frictional behavior.

Application

Valves

Media

Most chemicals (solvents, hydrocarbons, acids, lyes), alcohols, steam, oils etc.

Exceptions: strongly oxidizing acids like sulfuric acid and nitric acid in high concentrations.

Certificates / Approvals

TA-Luft, ISO 15848, API 622

VALUES TO THE CUSTOMER

- Full compliance to latest Fugitive Emission regulations
- High temperature and chemical resistance
- Low compression required due to optimized ring configuration
- Good extrusion resistance even at high pressures
- Improved sealing effect provided by selected materials and improved impregnation
- Permanent elasticity

Operating Conditions

Valves		
p	45 MPa	6,527 psi
T	-200 ... +450 °C (most media) -200 ... +550 °C (steam)	-348 ... +842 °F -348 ... +1022 °F
v	2 m/s	394 fpm
pH	0 ... 14	0 ... 14

OVERVIEW NON-STANDARD PACKINGS

Merkel packing	Description	Pressure (MPa)			Speed (m/s)		Temperature (°C)	pH
		Rotary pumps	Plunger pumps	Valves	Rotary pumps	Plunger pumps		
	Merkel Ramiflex 4510 Ramie fibre with special red grease impregnation	1.6	10		10	1	-10 ... +120	6-9
	Merkel Arolan 6210 Multi-filament aramid yarn with PTFE impregnation and lubricant	2.5	20		26	2	-50 ... +280	1-13
	Merkel Arochem II 6211 PTFE/Graphite compound yarn re-inforced with aramid corners		50			2	-50 ... +280	1-13
	Merkel Arochem 6212 PTFE yarn re-inforced with aramid corners	2.5	50		15	2	-50 ... +280	1-13
	Merkel Aroflex 6226 Staple aramid with mineral grease/graphite impregnation	1.6			10		-10 ... +150	2-13
	Merkel Flexalon 6250 White synthetic yarn with PTFE impregnation and lubricant	2.5			25		-50 ... +250	1-13
	Merkel Unival II 6326 Graphite-impregnated PTFE yarn with silicon oil lubrication	2.5			15		-100 ... +280	0-14

OVERVIEW NON-STANDARD PACKINGS

Merkel packing	Description	Pressure (MPa)			Speed (m/s)		Temperature (°C)	pH
		Rotary pumps	Plunger pumps	Valves	Rotary pumps	Plunger pumps		
	Merkel Unival GFO® 6329 100% GFO yarn	2.5			25		-100 ... +280	0-14
	Merkel Thermapack 6401 High quality silicic acid yarn			1			-50 ... +1,100	5-9
	Merkel GC Spezial 6567 Expanded flexible graphite fibres and carbon fibres	2.5		45	20		-30 ... +400 +550 ¹	0-14
	Merkel Grafolan HT 6570 Graphite yarn with special PTFE impregnation			30			-30 ... +450 +550 ¹	0-14
	Merkel G-Spezial AR 6562 Expanded graphite yarns with aramid re-inforced corners	4			25		-100 ... +280	1-13
	Merkel Carboflex 6587 Carbon yarn with special PTFE/Graphite impregnation	2.5			25		-30 ... +300	0-14
	Merkel Carbosteam S 6555 Expanded graphite core with carbon yarn overbraid			30			-30 ... +400 +550 ¹	0-14


¹ steam

© GFO, Inconel

GLAND DESIGN


Here are various examples of basic packing applications

Basic design of a stuffing box

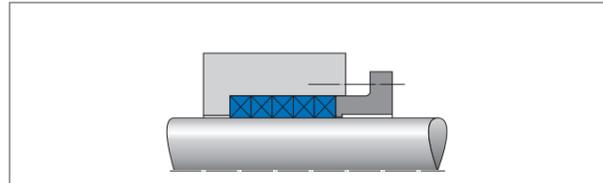


General application for valves, centrifugal and plunger pumps

Stuffing box with lantern ring

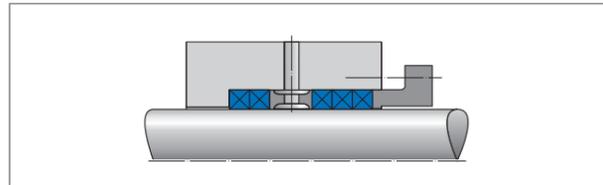


- For lubrication
- For sealing at high pressure (greater than pump pressure)
- For sealing at negative pressure (leakage suction)
- For cooling

Stuffing box with different types of packings

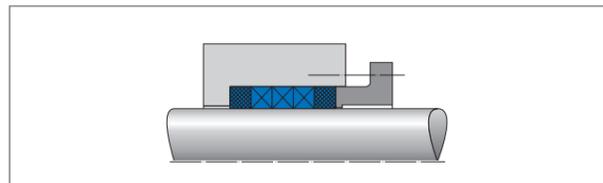


- For protection of a plastic type packing, braided packing is used as anti-extrusion ring
- Highly pre-compressed rings for bridging large extrusion gaps
- High-density spacer rings as replacement for metal guides

Stuffing box with two lantern rings

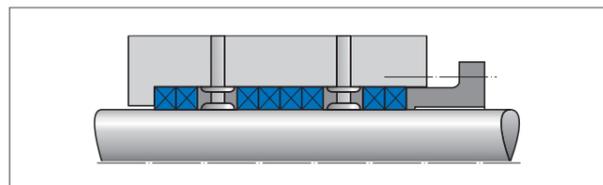


- First ring for high-pressure lubrication, second ring for suction
- Sealing with different media

Stuffing box with cooling manifold

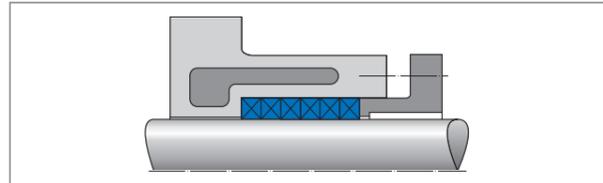


For shaft seals with media boiling point below operating temperature

Stuffing box with inside spring

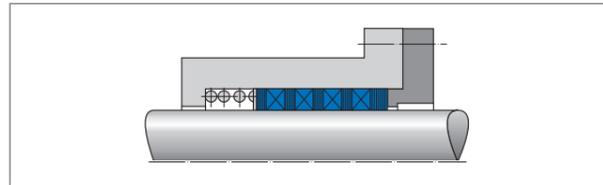


Predominantly on high-pressure plunger pumps (Spring adjustment only to ensure a preliminary sealing)

Stuffing box with outside spring

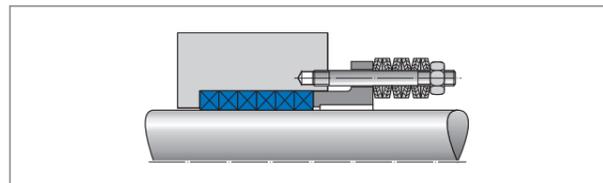

Maintenance-free sealing. Spring load must exceed pressure of medium by ring surface area!

Self-sealing end cover with highly compressed Grafflex rings

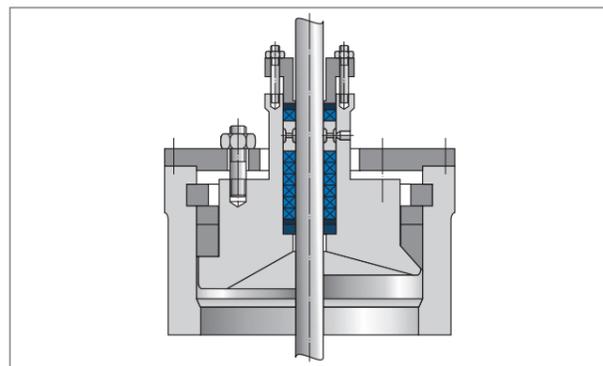

Application e. g. Bredtschneider-Uhde system

INSTALLATION GUIDE

To pack a stuffing box either “cut to size” or use die-formed rings. Use the Merkel packing cutter for an exact length and form a ring around the shaft or spindle. If no tool is available simply wind the packing around a shaft or pipe of correct diameter and cut. A diagonal cut helps to produce a better sealing effect than a straight cut. When cutting packings that tend to fray, place adhesive tape over the area to be cut and then cut through the tape.

Install each ring into the stuffing box bore, ensuring the ends are placed together and first introduced followed by the rest of the ring. Also ensure the joints are placed 90° to each other. The packing should initially be tightly compressed so that it will mould and seat itself in the stuffing box. The gland nuts should then be loosened and retightened to a medium setting.

Pre-compression of Packings

The correct pre-compression and operating compression of the gland is dependant on the type of packing and its application. The appropriate gland pressure can only be measured with a torque wrench or similar instrument.

Pump Packings

Pump packings are applied with a gland pressure of 1.05 to 2.0 times the pressure of the medium. However, a minimum pressure of 0.5 to 1.5 N/mm² is necessary.

Valve Packings


Valve packings are applied with a gland pressure of 2 to 5 times medium pressure and a minimum pressure of 5 N/mm². Please consult our technical advisory service for the correct values.

“Running in” of New Packings

Pump packings are particularly susceptible to damage through high temperature during the run-in period. Therefore it is important to pay special attention to the shaft temperature during the run-in phase. If the packing runs too hot the pump must be stopped. After a short cooling down period a regular drip should appear and the pump can then be restarted. It may be necessary to repeat this procedure several times until regular leakage appears.

Installing Pre-formed Rings

Pre-formed rings with exact dimensions should be handled with particular care in order to retain the advantages that these rings offer. If the rings have to be opened to fit onto the shaft then the ring ends should be opened axially only enough to fit the ring over the shaft. Bending the ring radially deforms the ring and makes installation more difficult.

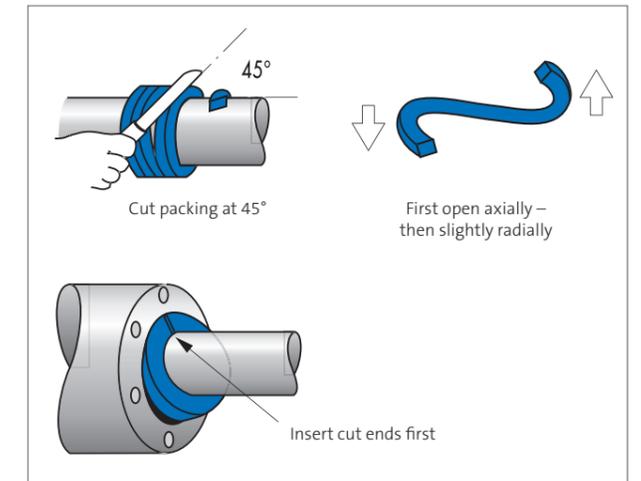

Tolerances and Surface Finishes

The surface finish should not exceed the following values:

- Centrifugal pump shafts, plungers and spindles $R_a < 0.25 \mu\text{m}$
- Stuffing box bores $R_a < 2.5 \mu\text{m}$

These values are for general applications. For increased sealing effect and longer service life the R_a values should be reduced to $R_a < 0.1 \mu\text{m}$. The permissible eccentricity on centrifugal pumps should be less than $1/1000$ of the shaft diameter. In the interest of reduced leakage the eccentricity must not exceed $1/100$ of the packing width.


Gap Width

The permissible extrusion gaps between shaft and gland are $2/100$ of the packing section. If the gaps are larger or the packing in question is inclined to extrude, suitable anti-extrusion rings should be fitted. A copy of our detailed installation instructions is included with each delivery.

FITTING TOOLS

1 Merkel Packing Extractors 7500

Merkel Packing Extractors have been developed for rapid and careful removal of old sealing material to provide a clean stuffing box before applying the new packing. They are made from stainless steel. With its flexible and powerful shaft, even packings in difficult to access stuffing boxes of pumps, valves, mixers and other applications are easy to remove. These extractors are available in four sizes (see table on the right). They can be ordered separately or as a set consisting of a case and extractors in sizes 1, 2 and 3.

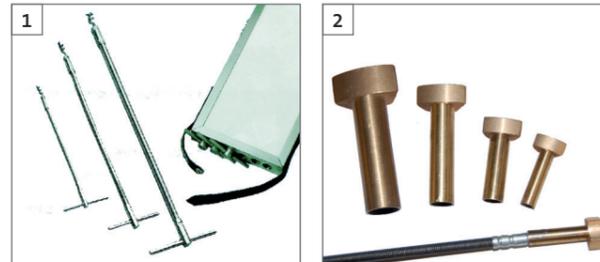

1 Merkel packing extractors			
Size	Length	Installation space	Article no.
3	22 cm	6 mm	24107984
2	33 cm	10 mm	24107985
1	44 cm	13 mm	24107986
0	50 cm	16 mm	24107987
Extractor set (sizes 1, 2, 3)			24107983

2 Merkel Ring Segments 7511

For the installation of stuffing box packing, metal ring segments can be screwed onto the Merkel Packing Extractors making them the ideal tool for pushing the packing evenly into the installation space without damaging the shaft or the housing of the stuffing box. Merkel ring segments are available in 4 sizes equivalent to the sizes of the Merkel packing extractors.


2 Merkel ring segment	
Size	Article no.
3	24107988
2	24107989
1	24107990
0	24107991

VALUES TO THE CUSTOMER

- Flexible shaft for working on hard-to-reach stuffing boxes
- Special manufactured screw for all type and size of stuffing box packing and metal ring segments

3 Merkel Packing Cutter 7505

The universal packing cutter is designed for the precision cutting of packing materials. With the help of this cutter, precise lengths can be cut from a coil of packing material.

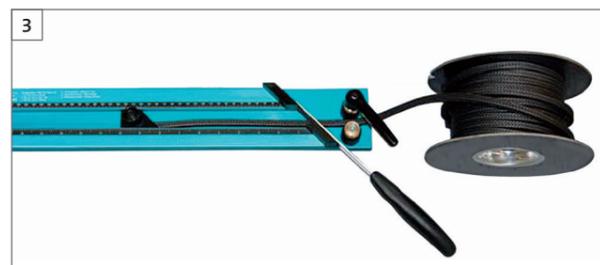

3 Packing cutter	
	Article no.
Merkel 7505	24118583
Replacement knife 7513	24122885

VALUES TO THE CUSTOMER

- For radial scarf cuts of 45° for shafts and spindles. Maximum cutting length 470 mm.
- Cross section measuring scale in inches and millimeters
- Clamping device for holding the packing in place
- Finger guard for additional safety quality
- Knife (can be ordered as replacement knife 7513)

TABLE OF PRINCIPAL MEDIA GROUPS

Principal Media Group	Merkel Packing														
	Arochem S 6216	Arolan II 6215	Kombilon 6742	Ramilon 4586	Unichem 6313	Uniflex 6588	Unistat 6303	Unival 6323	Univerdit 7000	Alchem 6375	Arostat 6204	Carbosteam 6550	Grafflex 6501	G-Spezial 6560	G-Spezial S 6565
1. Acids															
1.1 Heavily diluted inorganic and organic acids	■	■	■		■	■	■	■	■	■	■	■	■	■	■
1.2 Concentrated organic acids, inorganic acids (medium concentration)	○	○	■		■	○	■	■	■	■	○	■	■	■	■
1.3 Concentrated inorganic acids			■		■		■	■		■	○	○	○	○	
2. Alkalis															
2.1 Diluted alkalis	■	■	■	○	■	■	■	■	■	■	■	■	■	■	■
2.2 Concentrated alkalis	■	■	■	○	■	■	■	■	■	■	■	■	■	■	■
3. Oils and lubricants															
3.1 Mineral oils and lubricants, plant and animal oils and lubricants	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
3.2 Synthetic oils, heat transfer oils	■	■	■		■	■	■	■	■	■	■	■	■	■	■
4. Other organic compounds (nitriles, amines, lactames)	■	■	■		■	■	■	■		■			■	■	■
5. Neutral aqueous solutions (salt solutions)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6. Solvents (aliphatic and aromatic hydrocarbons, aldehydes, alcohols, esters, ketones, chlorinated hydrocarbons)	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
7. Steam															
7.1 up to 180 °C	■		■			■	■	■	■	■	○	■	■	■	■
7.2 up to 280 °C	■					■	■	■	■	■	■	■	■	■	■
7.3 up to 550 °C															
8. Steams and gases															
8.1 Inert gases, Air	■	■	■	○	■	■	■	■	■	■	■	■	■	■	■
8.2 Volatile hydrocarbons, solvent steams	■	■	■		■	■	■	■	■	■	■	■	■	■	■
8.3 Sour gases	■	■	■		○	■	■	■	■	■			■	■	■
8.4 Oxygen Hydrogen	■	■	■			■	■	■	■	■	■		■		
9. Water															
9.1 Drinking water, sea water, sewage, hot water up to 100 °C	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
9.2 Hot water over 100 °C, boiler feed water	■	■	■	○	■	■	■	■	■	■	○	■	■	■	■

MEDIA TABLE KEYED TO PRINCIPAL GROUP

A		Calcium bisulphites (alkaline)	5;1.1	Ethyl acetate	6	I		P		Sodium sulphite	5; 1.1
Accumulator acid	1.2	Calcium chloride, aqueous	5	Ethyl alcohol	6	Iodine, tincture	6	P3° alkali	2.1; 2.2	Sodium thiosulphate	5
Acetic acid	1.1; 1.2	Calcium hydroxide, aqueous	2.1	Ethyl benzene	6	Iodine-potassium iodide, aqueous	5	Palmitic acid	1.1	Soluble sodium	5
Acetic acid, glacial	1.1; 1.2	Calcium hypo-chloride	1.1; 1.2	Ethyl chloride	6	Iron nitrate	1.1	Paper pulp	5	Steam	7
Acetic anhydride	1.1; 1.2	Camphor	4	Ethylene	8.2	Iron-III-Chloride, aqueous	5	Paraffin	3.1	Steam up to 180°C	7.1
Acetone	6	Caprolactam	4	Ethylene chloride	6	Isobutanol alcohol	6	Paraffin oil	3.1	Steam up to 280°C	7.2
Acetylene	3.2	Carbon dioxide (gas)	8.1	Ethylene glycol	6	Isobutyl ketone	6	Pentane	6	Steam up to 600°C	7.3
Acids of a sulphurous type	1.2	Carbon monoxide	3.1	Ethylene oxide	8.2	Isooctane	6	Perchlorethylene	6	Stearic acid	1.1
Acrylonitrile	4	Carbon tetrachloride	6	F		Isopropanol	6	Perchloric acid	1.2; 1.3	Sulphite alkali	2.1; 2.2
Adipic acid	1.1; 1.2	Caustic potash	2.1; 2.2	Faecal matter	9.1	Isopropyl acetate	6	Petrol	3.1	Sulphur dioxide	8.3
Aircraft fuel	6	Chlorinated paraffin	3.2	Fatty acids	1.1; 1.2	Isopropyl ether	6	Petroleum	3.1	Sulphuric acid	2.1; 2.2
Al-Acetate	5	Chlorine water RT	1.2; 1.3	Fatty alcohol	6	L		Petroleum ether	6	T	
Al-Chloride	1.3	Chlorine, wet	8.3	Ferric sulphate, aqueous	5	Lactic acid	1.1	Phenol, aqueous	1.1; 1.2	Tallow	3.1
Alum, aqueous	1.1	Chlorobenzene	6	Fixing bath	2.1	Lauryl alcohol	6	Phosphoric acid	1.1; 1.2	Tannic acid	1.1; 1.2
Aluminium sulphate	2.1	Chloroform	6	Fluorine, dry	8.3	Lead acetate, aqueous	5	Phthalic acid	1.1; 1.2	Tannin	1.1
Ammonia, aqueous	2.1; 2.2	Chlorsulphonic acid	1.1; 1.2	Fluorobenzene	6	Lithium chloride	5	Phthalic anhydride	1.1; 1.2	Tar	3.1
Ammonia, gaseous	2.2	Chromic acid	1.1; 1.3	Fluorosilicic acid	1.1; 1.2	M		Pine needle oil	3.1	Tartaric acid	1.1; 1.2
Ammonia, liquid	2.2	Citric acid	1.1; 1.2	Formaldehyde	6	Magnesium chloride	5	Potassium acetate, aqueous	5	Tetrahydrofurane	6
Ammonium chloride	5	Coconut oil	3.1	Formic acid	1.1; 1.2	Magnesium hydroxide	2.1; 2.2	Potassium bromide, aqueous	5	Toluene	6
Ammonium sulphate	5	Cod-liver oil	3.1	Freon types	6	Magnesium sulphate	5	Potassium carbonate, aqueous	2.1	Town gas	8.2
Aniline	4	Coke-oven gas	8.1	Frigen types	6	Maleic acid	1.1; 1.2	Potassium chlorate, aqueous	5.2	Tributyl phosphate	1.2; 1.3
Antifreeze (motor vehicle)	6	Copper chloride, aqueous	5	Furnace gas, dry	8.2; 8.3	Maleic anhydride	1.2	Potassium chloride, aqueous	5	Trichloroacetic acid	1.2; 1.3
Asphalt	3.1	Copper sulfate, aqueous	5	G		Methacrylic acid methyl ester	6	Potassium cyanide, aqueous	5	Trichlorethylene	6
ASTM oils 1,2,3	3.1	Cresylic acid	6	Gas oil	3.1	Methane	8.2	Potassium hydroxide	2.1; 2.2	Triethanolamine	4
Atznatron/Natron alkali	2.1; 2.2	Crude oil	3.2	Gelatine	5	Methanol	6	Potassium nitrate, aqueous	5	Turpentine	6
B		Cupric acetate, aqueous	5	Glaubers salt, aqueous (sodium sulphate)	5	Methyl ethylketone (MEK)	6	Potassium silicate, aqueous	5	U	
Barium salts, aqueous	5	Cyclohexane	6	Glue, aqueous	5	Methyl glycol acetate	6	Propane	8.2	Urea, aqueous	5
Benzaldehyde	6	Cyclohexanol	6	Glycerine	6	Methyl isobutyl ketone	6	Propanol	6	V	
Benzene	6	Cyclohexanone	6	Glycol	6	Methylene chloride	6	Propyl acetate	6	Vinyl acetate	6
Benzoic acid, aqueous	1.1; 1.2	D		Greases	3.1	Milk of lime	2.1; 2.2	Propylene glycol	6	Vinyl chloride, aqueous	4
Benzyl alcohol	6	Diamide, hydrazine	2.1; 2.2	Groundnut oil	3.1	Mineral oil	3.1	R		W	
Benzyl chloride	6	Dibenzyl ether	6	Group H, HL, H-LP	3.1; 3.2	Monobromobenzene	6	River acids, concentrated	1.2; 1.3	Waste water	9.1
Bitumen	3.1	Dibutyl ether	6	H		Monochloroacetic acid	1.2; 1.3	S		Water, boiler feed water	9.2
Blast furnace gas	8.2	Dibutyl phthalate	6	Heat transfer oil	3.2	Monochloroacetic acid	1.2; 1.3	Salicylic acid	1.1; 1.2	Water, cold	9.1
Boiler feed water	9.2	Dichlorethane	6	Heating oil	3.1	N		Sea water	9.1	Water, sea water	9.1
Borax, aqueous	5	Diesel oil	3.1	Hexane	6	Naphta	6	Sea/lake water (salt water)	9.1	Water, up to 100°	9.1
Brake fluid (ATE blue)	3.2	Diethanolamine	4	Hydraulic fluids/ mineral oil based	3.1	Naphtaline	6	Silicone oil	3.2	Wood pulp	5
Bromine	2.3	Diethyl ether	6	Hydraulic fluids/ phosphate ester based	3.2	Natural gas	8.2	Silver nitrate, aqueous	5	X	
Butadiene	8.2; 6	Diethylene glycol	6	Hydrobromic acid	1.1; 1.2	Nickel sulphate	5	Soap solution	5	Xylene	6
Butane	8.2; 6	Diethyl sebacate	6	Hydrochloric acid	1.1; 1.3	Nitric acid	1.2; 1.3	Sodium carbonate	2.1	Z	
Butanediol	6	Diethylene glycol	6	Hydrocyanic acid	1.1; 1.2	Nitrobenzene	6	Sodium chloride	5	Zinc chloride	1.1
Butyl acetate	6	Dimethylformamide	6	Hydrogen chloride gas	8.3	O		Sodium cyanide	5	Zinc sulphate	1.1
Butyl alcohol	6	Diocetyl phthalate	6	Hydrogen peroxide	5	Oleum	1.3	Sodium hypochlorite	1.1; 1.2		
Butylene glycol	6	Diphenyl oxide	6			Oxalic acid	1.1; 1.2	Sodium nitrite	5		
Butyraldehyde	6	Diphyl	3.2			Oxygen, gaseous	8.4	Sodium phosphate	5		
Butyric acid	1.1; 1.2	Dowtherm A	3.2					Sodium silicate	5		
C		E						Sodium sulphate	5		
Calcium acetate	5	Ethane	8.2					Sodium sulphide	5		
		Ethanolamine	4								

Editorial Information

Freudenberg FST GmbH
Höhnerweg 2–4
69469 Weinheim, Germany

Published by
Freudenberg Sealing Technologies GmbH
Heavy Industry

Service Contact
www.fst.com

January 2024

www.fst.com

INNOVATING TOGETHER